

WHITE RABBIT ZEN TIME PROVIDER

WR-ZEN TP-32BNC



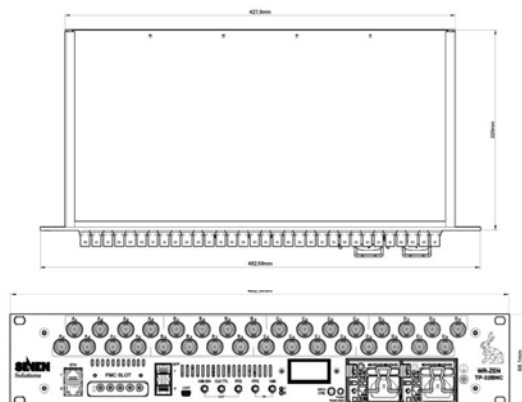

The Seven Solutions reliable node that provides multiple legacy 10MHz/xPPS timing outputs for all equipment in your rack cabinet through White Rabbit time transfer and its redundant connections.

The WR-ZEN TP-32BNC easily distributes time and frequency to other equipment by implementing standard timing protocols such as PTP, NTP, IRIG-B, 10MHz/xPPS, etc.

The WR-ZEN TP-32BNC combines ultra-stable clocks with low jitter and temperature compensated clock resources to enhance its synchronization accuracy.

Technical Specifications / WR-ZEN TP-32BNC

System On-Chip	
SoC	Xilinx Zynq series
CPU	Dual ARM® Cortex™-A9 MP@ 866MHz
Memories	<ul style="list-style-type: none"> • 512 MB DDR3 (32-bit bus) • 256 Mbits Quad-SPI Flash • 16GB SD Card
Software	
OS	Linux (Kernel v4.6)
Time Sync.	White Rabbit PTPv2 (default and G.8265.1 profiles, up to 16 unicast clients) NTP (client & server)
Protocols	TCP/IP, SSH, SNMPv3, TFTP, DHCP, ARP, DNS, HTTP (web interface)
Front Panel	
Ethernet	2x 10/100/1000 Base-T RJ45 (Management, PTP, NTP)
SFP Ports	2x 1GbE
Clocks I/O	5x SMA coaxial connectors (3V/50Ω): <ul style="list-style-type: none"> • 10 MHz SINOUT ref. clock (PLL) • CLK OUT (LVTTTL) • PPS OUT/IRIG-B (LVTTTL) • PPS IN (LVTTTL) • 10MHz IN (TTL/CMOS/ECL/clippedsine)
Fanout	32 BNC configurable outputs divided in 2 groups (1.7V/50Ω): <ul style="list-style-type: none"> • A&B: 10MHz (xPPS under license) with 50Ω termination • C&D: xPPS, IRIG-B with selectable 50Ω termination
LCD	Information panel for alert & network
Debug	USB Mini-B (ARM-UART)



HIGHLIGHTS

Sub-nanosecond time accuracy
Remote configuration and monitoring
Distance range over 80 km using fiber
Xilinx Zynq Family (ARM Dual Core)
Linux OS
WR and PTPv2
Robustness & Redundancy
32 configurable timing outputs

Clock Performance

Phase noise (dBc/Hz)	1Hz	10Hz	100Hz	1kHz	10kHz	100kHz
Master	-78.7	-107.5	-132.6	-143.5	-147.5	-145.6
GM	-86.2	-87.6	-107.2	-140.8	-143.0	-146.0
Slave	-76.5	-79.7	-112.4	-143.6	-145.3	-149.1

TDev	@1 sec	@ 10 sec	@ 100 sec	@ 1000 sec
	1.92E-11	1.93E-12	1.94E-13	1.98E-14

Physical Specification

Dimension	428 mm x 88 mm x 220 mm
Color	White (Metallic)

Certification

Soldering	IPC-A-610 Rev E Class 2
Others	CE, FCC, ROHS, SE, ISO-9001, ISO-14001

Power Supply

Input	Redundant 2x 100-240VAC, 50-60 Hz
Output	12V DC, 6.66A – 80W max

Environmental Conditions

Temperature	-10°C ~ +50°C
Humidity	0% ~ 90% RH

